


Fronius Solar Net

Connection to MX add-on module MX-RS485/422



Notes

- If the wiring is incorrect, "COM ERROR" appears on the inverter display.
- An RS485 HUB can not be used to connect the inverters via RS422.

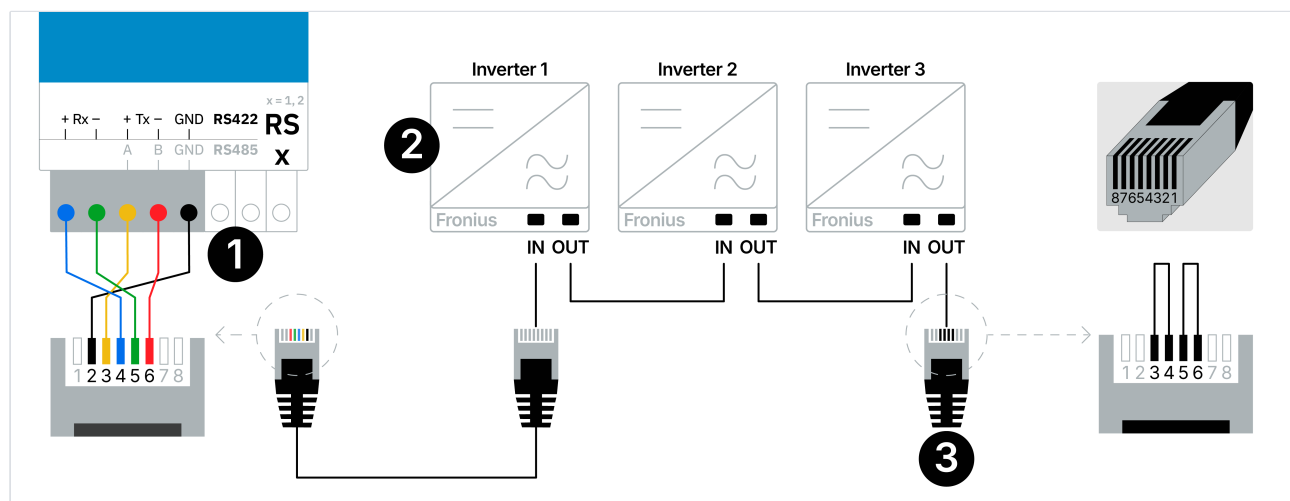

Fronius Solar Net: Inverter connection

Description
1 MX add-on module MX-RS485/422
2 Fronius Solar Net inverters
3 Fronius termination plug
Caution The termination plug is mandatory.

General information

Protocol	Interface
SolarNet	RS422 MX add-on module MX-RS485/422 required.

Inverter settings

Setting	Input
Protocol	Solarnet

Setting	Input
Address	Recommended starting from address 1
Baud rate	57600
Data format	8N1