


Tm-RS485-MB module temperature sensor (Modbus RTU)

Connection to bluelog Neo

- Set the bus address on the sensor (see sensor documentation).
- If the device is the last one on the RS485 bus, terminate the bus with a 120 Ω terminating resistor.
- Various Modbus devices can only be queried together if the serial communication parameters are identical (baud rate, number of data bits, parity, stop bits).

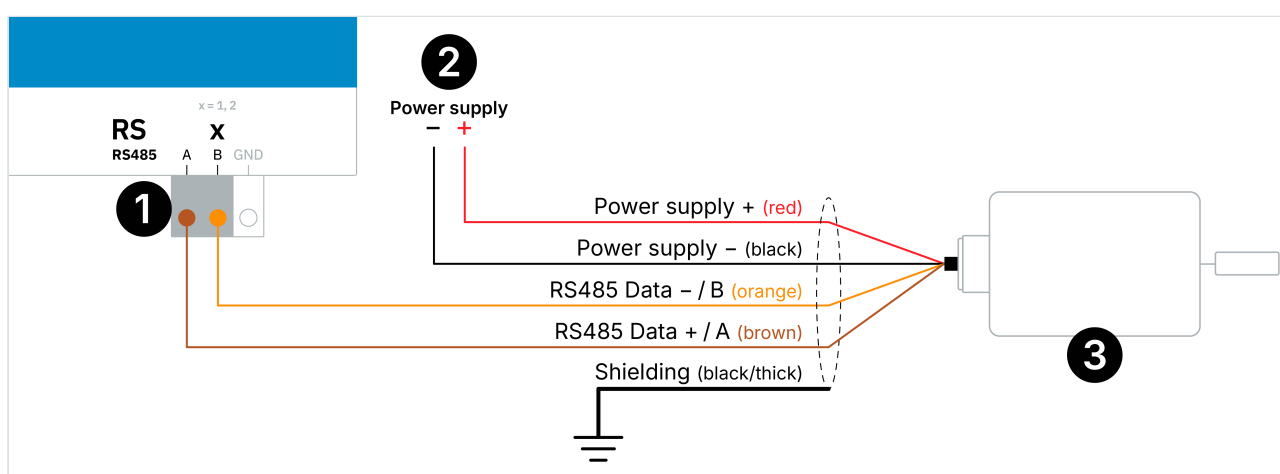

Tm-RS485-MB module temperature sensor (Modbus RTU): Sensor connection

	Description
1	Data logger terminal, RS485
2	External power supply
3	Tm-RS485-MB sensor

Connection

Wire color	Use
Red	Power supply + (10 ... 28 V DC)
Black	Power supply -
Orange	RS485 Modbus interface B (-)
Brown	RS485 Modbus interface A (+)
Black (thick)	Shielding



Item numbers

Sensor	Item nos.
Tm-RS485-MB	423.222